

TENTEX Premium Blockout


Code: T9185BL-850

Frame Supported & Air Inflatable Structures

Colors

Data Sheet		Testing Method
Width (CM)	150cm - 320	
Light Transmission	$T_v < 0.2\%$	ASTM E 903 UNI EN 410
UV Transmission	$T_{uv} < 0.01\%$	ASTM E 903 UNI EN 410
Light Reflection	$P_v 87\%$	ASTM E903
Dimensional Stability	0.80%	
Thickness	0.70 mm +/-0.05mm	
Base Fabric	100%PES 1100Dtex 9 x9/CM	DIN EN ISO 2060 Plain 1/1
Total Weight	850 g/m ² 25.00 OZ/YD ₂	DIN EN ISO 2286-2 BS 3424 Method 5A
Composition Fabric	200 g/m ² 5.90 OZ/YD ₂	DIN EN ISO 2286-2 BS 3424 Method 5B
Composition Coating	650 g/m ² / 9.10 OZ/YD ₂ Polyester + PVC	DIN EN ISO 2286-2 BS 3424 Method 5B
Coating Type	Knife Coated	
Lacquering	PVDF/ACRYLIC L1/1 or V1/L1	
Breaking Strength Warp	2800 N/5cm 630 LBS/2inch	DIN 53 354 BS 3424 Method 6A FS5100
Elongation at Break	22%	
Tear Strength Warp	300 N	DIN 53 363 BS 3424 Method FS 5134
Tear Strength Weft	67 LBS 300 N 67 LBS	DIN 53 363 BS 3424 Method FS 5134
Seam Strength	100 N/5cm 22.52LBS/2inch	DIN 53 357 BS 3424 Method 9B FS 5970
Weldability	Hi Frequency / Hot Air	
Temperature resistance	-30°C/+70°C	DIN EN 1876-2 BS 3424 Method 10 FS 5874
Light Fastness (Except white)	7-8	DIN 54004 DIN EN ISO 877 BS 3424 Method 15
Solvent Resistance	Resistant	DIN 51 635
Water Resistance	Impermeable WP	DIN 53 886
Flammability (Optional)	M2 B1, B2 S / L Scale CL2	NFP 92.503 DIN 4102 DIN 75200 / NFPA-701 UNI 8456 8457
Application	Tentex Roof	

Width Color	150 cm	200 cm	250 cm	300 cm
1024	■	■	■	■
1028	■	■	■	■
2003	■	■	■	■
2004	■	■	■	■
3001	■	■	■	■
3015	■	■	■	■
4005	■	■	■	■
4006	■	■	■	■
5002	■	■	■	■
5063	■	■	■	■
6026	■	■	■	■
7500	■	■	■	■
7024	■	■	■	■
7999	■	■	■	■
9002	■	■	■	■
0000	■	■	■	■

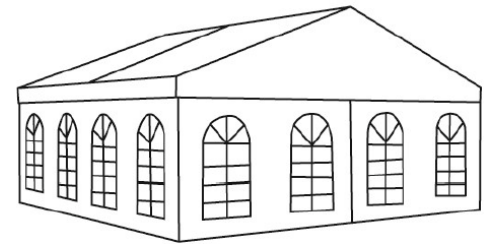

All our technical characteristics are indicative
 *Technical Data sheet are Based on Average Results. Due to Production Procedures slight Deviations can occur. All Data is provided by in House Lab and 3rd Party Lab. Results may vary if Executed at Different Laboratories or due to Different Standard interpretations. Applications suggested here do not release the customer from testing material for its intended Applications.

Sale Office UAE : Mumtaz Tents Factory / Main Ittehad Road Industrial Area 7 Shariah Tel: +971 6 531 4614



We Supply the General Delivery, Payment Conditions For ALL Our offers. These conditions are deposited at the country court and at the Chamber of Commerce and can be send by request.

www.mittant.com info@mittant.com

© Copyright 2018- 2019